

Shandong Everstable Machinery is a professional supplier of wood based panel machine, with 20 years developing history in China. Products has been exported globally.

Company with a wealth experience in the wood machine especially the plywood & veneer machine manufacturing area with continuous improvement and after-sale supporting.

Supply full set wood products making solutions , making, exporting and accessories supplying. Main products : hot press, veneer peeling machine, veneer drying machine, splicing machine and related wood working machinery.

We insist on installing continuous relationship by supplying customer with good quality machinery and sincere after sale service. Focusing on building the complete wood machine supply chain. Looking forward your suggestions and cooperation.



veneER PRODUCTION MACHINE

Hydraulic Spindle Peeling-JLHYK-260



High Lights

- Hydraulic cylinder clamp the logs, more efficient and accurate.
- Heavy duty lathe. Max log diameter 1.8m
- PLC control. easy adjust.
- veneer thick max 8-15mm.
- for thick core plywood.
- Veneer smooth with no crack



Technical Data

Log length: 2600 mm
Diameter: 1800 mm
Thickness : 0.2~15 mm
Speed : 30~80 m/min
Main Motor: 55 kw
Weight : 16~28 Ton
Size: 6500*3200*2800mm



Veneer Production Machine

Face veneer chuck peeling machine




Vertical Type

Veneer Thickness: 0.2-2.4 mm
Log Diameter: 900 mm
Log Length: 2000-2600 mm
Final Log Core: 90mm
Weight: 8000 kg
Power: 35kw
Reference Log: Birch, Poplar.etc



www.sinowoodmachine.com

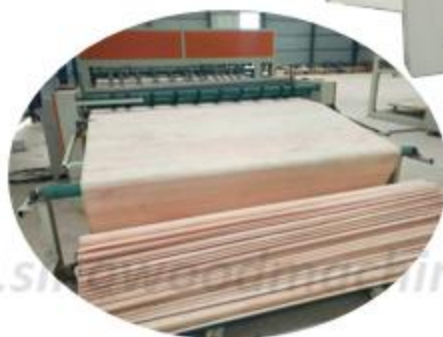

www.sinowoodmachine.com

Horizontal Type

Veneer Thickness: 0.2-2.4mm
Log Diameter: 1500mm
Log Length: 2000-2600mm
Final Log Core: 130mm
Capacity: 38kw
Reference Log: Okoume, Keruing.etc



VENEER PRODUCTION MACHINE

8ft heavy duty type peeling lathe.



Technical Data

Log length:	2600 mm
Diameter:	500 mm
Veneer thickness :	0.5~3.6 mm
Speed :	50 m/min
Motor QTY	7 sets
Power:	58 kw
Weight:	11,000 kg

Practical peeler with pretty good performance for high quality veneer .hot-sale products

www.sinowoodmachine.com



High Lights

- Mature design suits both hard and soft.
- Oil-immersed guide rail. reduce abrasion.
- Auxiliary guide rail, more balance structure.
- Hard treatment for rolls.
- NSK bearings, Huali motors.

VENEER PRODUCTION MACHINE

standard spindle less log debarking machine



High Lights

- Simple structure, easy operation
- Practical. High efficiency debarking and rounding.
- Hydraulic feed.

www.sinowoodmachine.com



efficient
rounding
and
debarking



Technical Data

	4ft	8ft	10ft
Log length:	1300 mm	2600mm	3200mm
Diameter:	500 mm	500mm	500mm
Veneer thickness :	1-3mm	1-3mm	1-3mm
Speed :	40 m/min	40 m/min	40 m/min
Power:	19 kw	24kw	35kw
Weight:	2800 kg	4800kg	7000kg

VENEER PRODUCTION MACHINE

High Equipped Debarking Machine. (600-900mm diameter)



High Lights

- Reinforced structure and frame.
- Bigger rolls with deep grains.
- Oil immersed round guide rail. smooth and accurate running.
- With carrying roll for extremely heavy logs.
- Wood chips sawing. easy deal with wood waste.



Technical Data

	4ft	8ft	10ft
Log length:	1400 mm	2700mm	3200mm
Diameter:	700-900 mm	700-900	700-900
Veneer thickness :	1-5mm	1-5mm	1-5mm
Speed :	40 m/min	40 m/min	40 m/min
Power:	31 kw	46kw	54kw
Weight:	3800 kg	8000kg	12000 kg

Veneer Production Machine

Face veneer, core veneer drying machine




AUTOMATIC VENEER PRODUCTION LINE

- log loading machine: 2 sets
- heavy duty log debarking machine: 1 set
- rotary spindle less peeling machine: 1 set
- automatic stacking machine: 1 set

- * veneer capacity : 55-75 CBM
- * total size (1 line): 8x30 m

SHANDONG EVEREST MACHINERY CO.,LTD

SIMPLE TYPE VENEER PEELING LINE

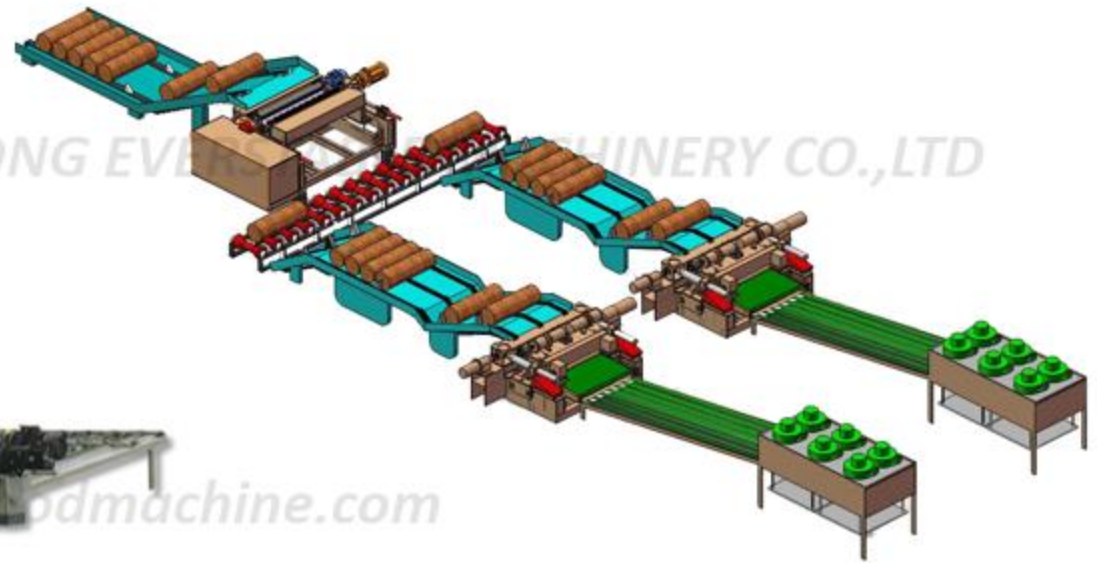

HEAVY DUTY. AUTOMATED VENEER PEELING LINE



WIRE LESS SPLICING MACHINE

sliced veneer cross composing. ESHJ-2800



www.sinowoodmachine.com

ANDONG EVERSTABLE MACHINERY CO.,LTD



- Solve glue thread residual problem, no need use wire.
- Seamless jointing. flat and smooth surface.
- High efficiency cross composing. Save labours.

0.35mm

Parameters	2800 type	3400 type
Sliced veneer thickness	0.35-3 mm	0.35-3 mm
Average Splicing speed	15-30 times/min	15-30 times/min
Sliced veneer length	400-2800 mm	400-3400 mm
Initial veneer width	70-620mm	70-620 mm
Final cut veneer width	adjustable	adjustable

WIRE LESS SPLICING MACHINE

sliced veneer vertical composing. ESVJ-1250.



- Vertical type jointing sliced veneer, no need wires,
- Efficient heating pipe+ chromeplated heating palte,
- Inverter adjust speed, feed speed arrive 45m/min,

0.3-3mm

Parameters	2800 type	
Sliced veneer thickness	0.3-2 mm	
Splicing length range	300-3000 mm	
Splicing width range	50-1500 mm	
Splicing temperature	100-220 °C	
Splicing speed	5-45 m/min	adjustable

VENEER PRODUCTION MACHINE

Face ,core veneer drying machine(line)



Mesh Type Dryer.

Veneer Thickness: 0.2-2mm

Working Width: 2800-4800mm

Drying Length: 18-36 m

Layer Quantity: 1-2 layers

Capacity: 1.3-3 m³/h



SHANDONG SINOWOOD MACHINERY CO., LTD.

Roller Type Dryer.

Veneer Thickness: 1-6 mm

Working Width: 2800-4800mm

Drying Length: 18-36 m

Layer Quantity: 1-4 layers

Capacity: 1.3-6 m³/h



Wire & Hot Pipe Dryer

Veneer Thickness: 0.2-0.9 mm



Working Width: 2800mm

Drying Length: 18-36m

Capacity: about 1m³/h

veneer dryer machine solid hot platen type. HG-4X8.SERIES

MESIN PENGERING VENEER. JENIS SOLID HOT PLATEN. HG-4X8.SERIES

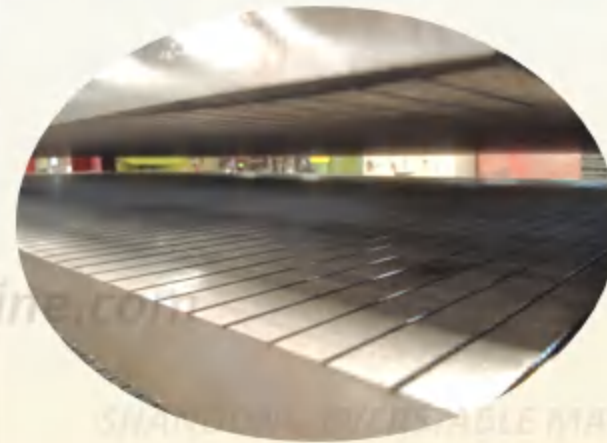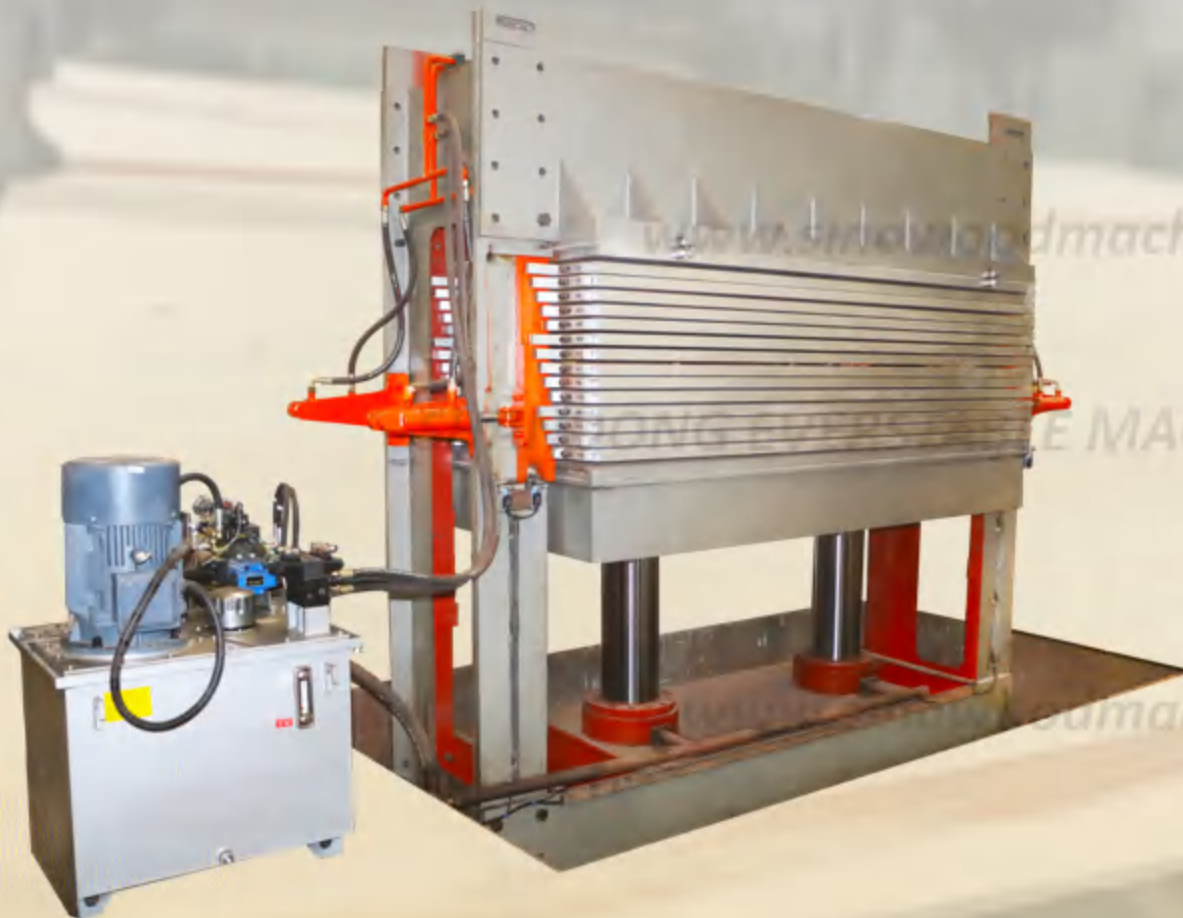

- Solid hot platen . make lines on surface.
- Efficiently discharge the moisture and flat veneers.
- High speed and quality oil cylinder.
- NC control, Siemens PLC .touch screen. auto working.
- Drying time and procedures-easy to control and adjust.

auto, efficient, durable

Parameters	UNIT	Model: HG- 4x8.A15
Hot platen thickness	mm	42
Veneer thickness	mm	1-6
Max veneer size	mm	1270X2600
Max pressure	TON	200
Main oil cylinder	mm	260X2
Power	KW	15+2.2

Veneer Production Machine

core veneer composing, finger jointing machine



'L' TYPE veneer jointing machine . combine horizontal veneer composing and vertical veneer jointing together.
greatly save the manual veneer assemble efficiency and improve plywood quality.



4 feet,5 feet,8 feet
Horizontal veneer composing machine
Vertical veneer composing machine
L type combined veneer composing and jointing machine



Plywood Making Machine

Glue Spreading Machine



www.sinowoodmachine.com



2 sides, 4 rollers Glue Spreading Machine

- Suits manufacturing: plywood, blockboard, bamboo plywood or the wood based panel secondary film faced laminating.
- Strong structure, speed adjustable, with protection cover.

Board length: 4ft-8ft

Max Thickness: 70mm

www.sinowoodmachine.com

MT6213


Plywood Making Machine

hot press, cold press.




Cold Press (Pre-press machine)

- Oil cylinder in upside position or bottom position
 - With chains transfer out pre-pressed plywood
 - Thick steel plate, wuxi oil cylinder
- Pressure: 400T-1600 T . Opening: 1800mm

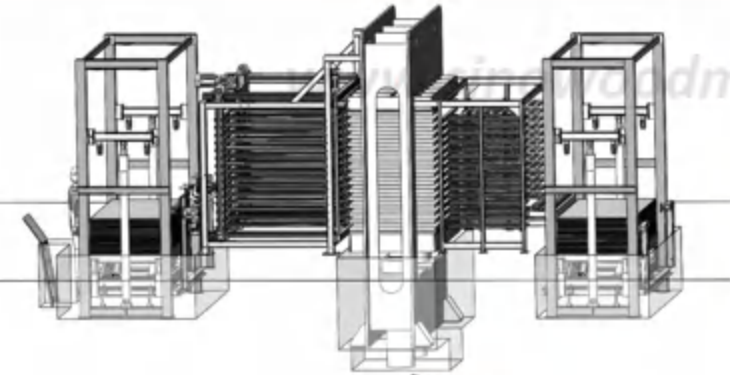


Hot Press Machine.

- Kunshan Hot platen double oil recycle.
 - Wuxi oil cylinder.
 - 40mm/35mm main structure thickness.
 - Auto hydraulic station control sytem.
 - Temperature control sytem.
- Pressure: 500T-1800 T . Daylights: 10-30 layers

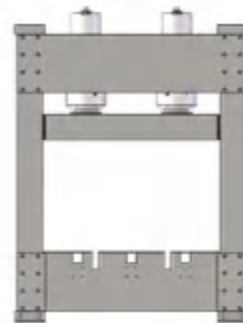

Plywood Making Machine

Edge Sawing Machine(trimming Saw)

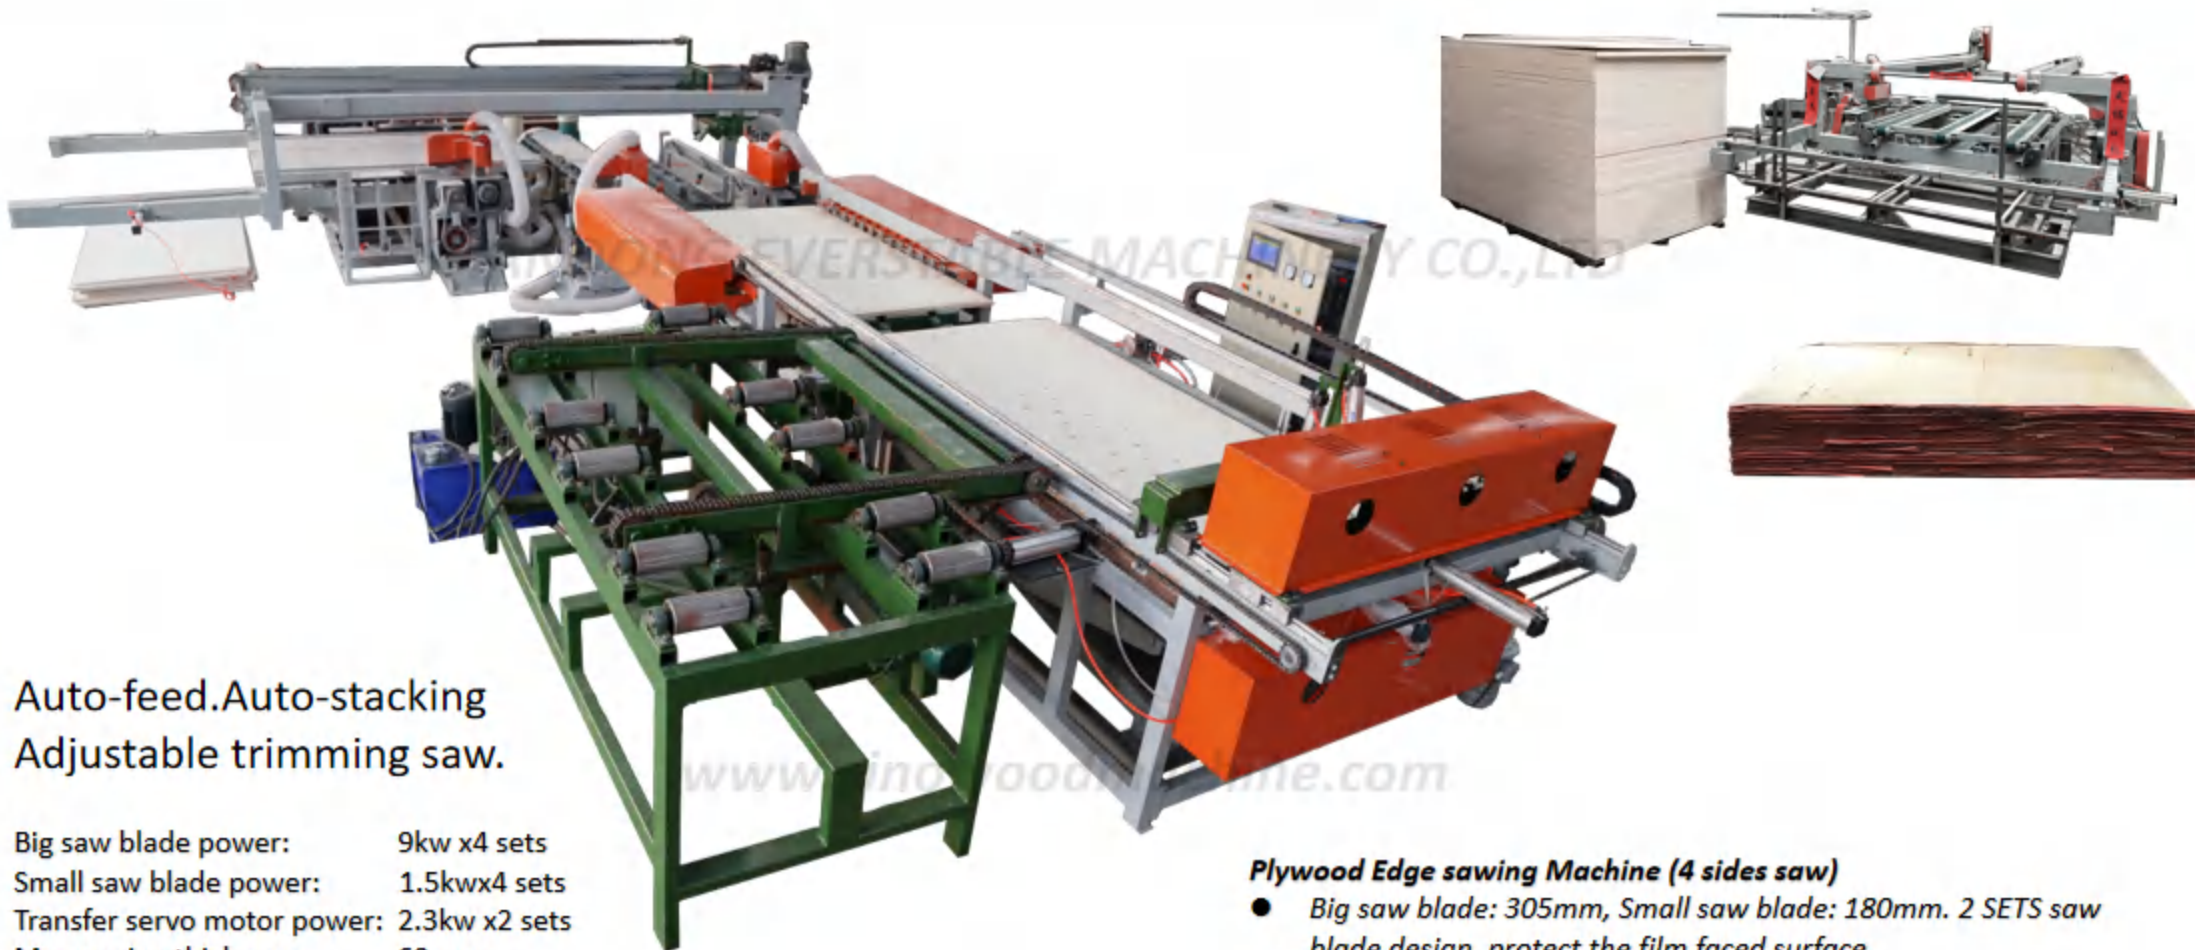

Auto-feed.Auto-stacking
Adjustable trimming saw.

Big saw blade power: 9kw x4 sets
Small saw blade power: 1.5kwx4 sets
Transfer servo motor power: 2.3kw x2 sets
Max sawing thickness: 60 mm
Speed: 30 second/time

Plywood Edge sawing Machine (4 sides saw)

- Big saw blade: 305mm, Small saw blade: 180mm. 2 SETS saw blade design. protect the film faced surface.
- Cutting Size: . 3x6' - 4x8' adjustable.
- Auto feeding board, auto stacking.
- Feed with servo motors (transfer). more smooth and accurate.
- Saw dust collecting.

Plywood Making Machine sanding, polishing machine



www.sinowoodmachine.com

Wide Belt Sanding Machine (Calibrating and Polishing)

*suits all kinds plywood, block board, wood planks calibrating
and polishing works.*



special size solid wood door, wood planks polishing machine



Plywood Making Machine

veneer grind, scarf jointing machine



single and double side veneer edge grinding machine.

veneer scarf jointing machine.

Grinding Machine

CNC Intelligent saw blade teeth grinding machine.



High Lights

- *Help you easily process saw blade with different teeth angles, chamfers even with losing teeth.*
- *No need frequently adjust and operating. save your time and costs.*
- *Grinding head can auto swing, sharpen left and right teeth in 1 time.*
- *New generation cnc control. More interlligent.*
- *Pretty practical ,accuracy and efficient*

www.sinowoodmachine.com

Technical Data

Saw blade diameter:	80~650mm
Grind head angle:	0~60°
Grind error:	< 0.02mm
Pushing rod stroke:	0~80mm
Saw blade cooling:	recycle water cooling
Working voltage	200~250v, 2 or 3 P
Power:	0.55kw
Weight:	160kg

www.sinowoodmachine.com



Grinding Machine

Electrical magnetism clamping knife grinding machine



Numerical type: *precision linear guideway, more accurate grind thickness. knife is more straight*


Automatic working. after finished setting recycle times. auto stop and alarm. No need watching, greatly save your time. (maximum save 40 minutes)



Heavy duty type:

better straightness, more precise. suits high precision large -scale knife manufacturing, mining machinery and hardware accessory factories. etc

*Grinding wheel head power: 25~30 KW
Process Knife Length: 1000~5000 mm*

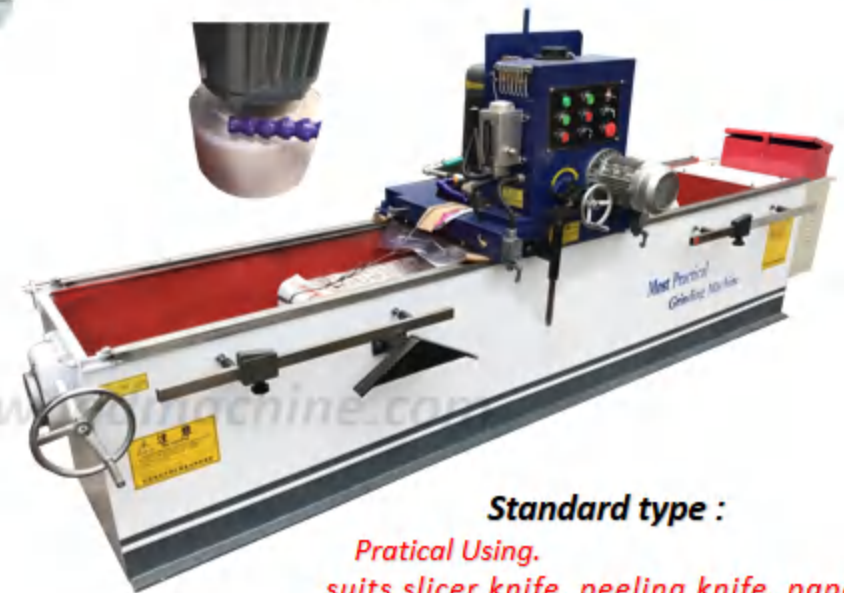

Standard type :


Practical Using. suits slicer knife, peeling knife, paper cutting knife.etc grinding.

*Grind wheel head power: 4kw.
Knife Length: 1000~6000 mm*

OTHER WOOD BASED PANEL MAKING MACHINERY




25-40 LAYERS AUTOMATIC HOT PRESS MACHINE

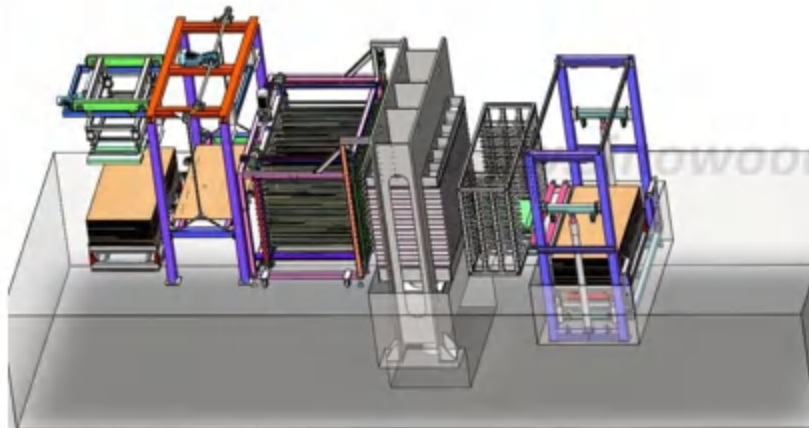

nowoodmachine.com

STABLE MACHINE CO., LTD

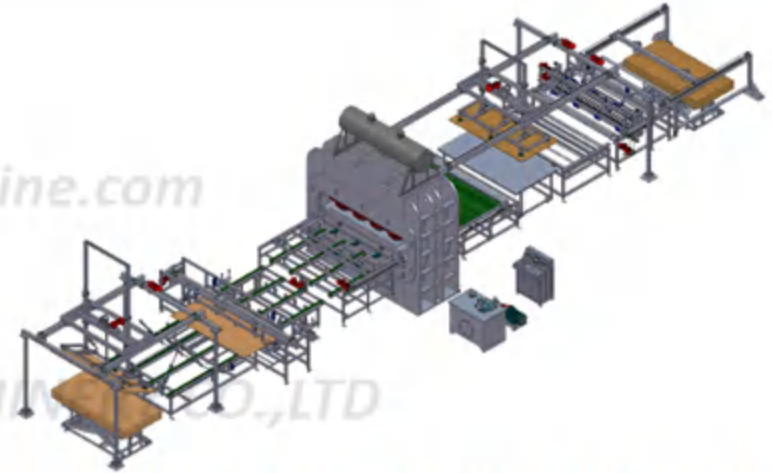

SHORT CYCLE MELAMINE PAPER FILM LAMINATION SERIES



WOODWORKING MACHINE


Multiple Blade Saw.



Multiple Blade Rip Saw. Double Spindle.

www.sinowoodmachine.com

SHANGHAI EVERETT MACHINERY CO., LTD

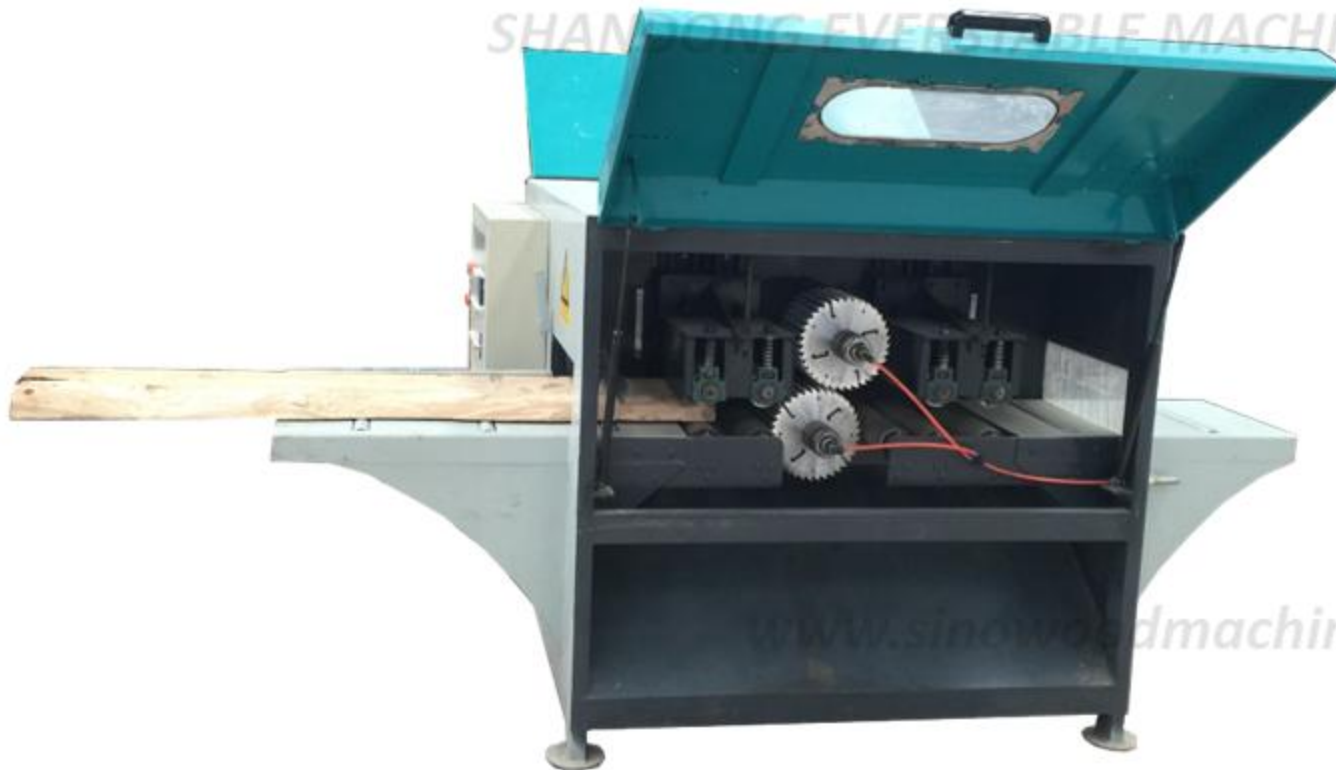

Technical Data

Max sawing width:	250-400 mm
Max sawing thickness:	80-160 mm
Minum sawing length:	500-600 mm
Saw blade diameter:	180-280 mm
Power:	2 x (15-37kw)

www.sinowoodmachine.com

WOODWORKING MACHINE

Band Saw



TWIN VERTICAL BAND SAWMILL (Flat Bottom)

www.sinewoodmachine.com



SHANDONG EVERSTARLE MACHINERY CO.,LTD
SHANDONG EVERSTARLE MACHINERY CO.,LTD

www.sinewoodmachine.com




Technical Data

Max cutting diameter:	650 mm
Min cutting diameter:	150 mm
Log length:	800-3500 mm
Speed :	9-25 m/min
Power	18.5kw x2

Machines markets

wood based panel machinery manufacture, supplier

Date upgrades till 2020.5.1

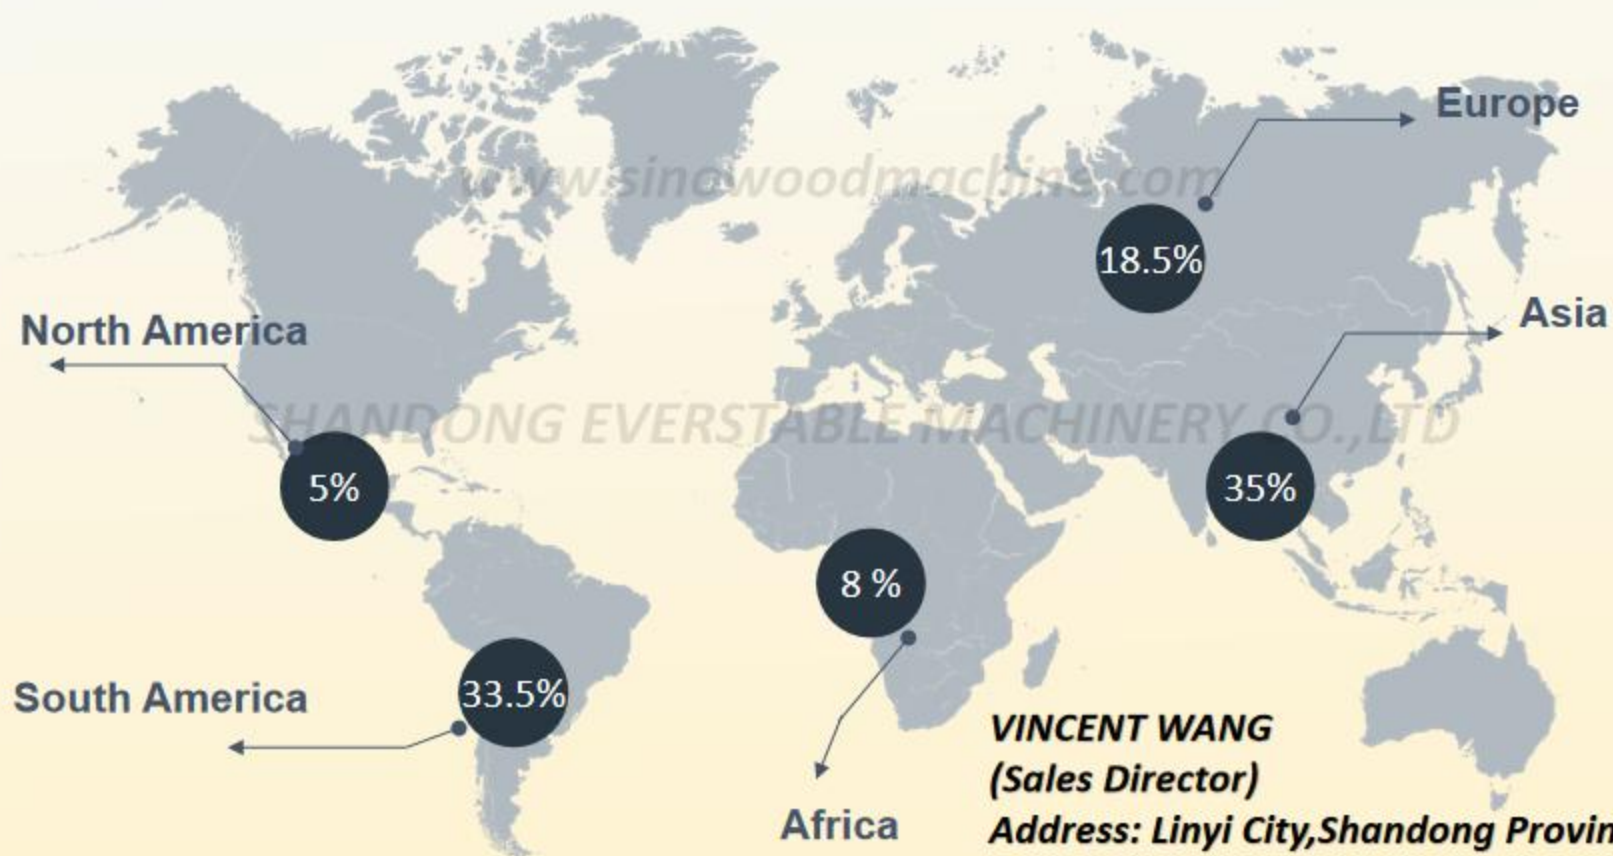

VINCENT WANG
(Sales Director)
Address: Linyi City, Shandong Province, China.
Mobile, whatsapp: +86 15854986399
E-Mail: info@sinowoodmachine.com
woodmachine@hotmail.com
Website: www.sinowoodmachine.com
Reliable business partner, forever friend.